


# Switches

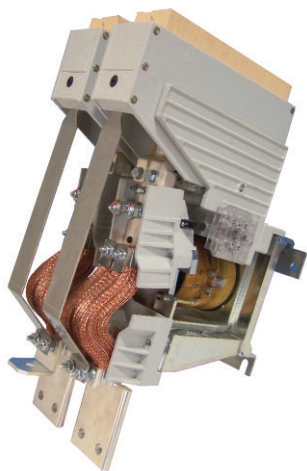

## LTHS17003SAT0

Type	LTHS 1700
Number of Poles	3 NO
Mounting Position	Vertical
Control Voltage Rating	230 Vac (through rectifier)
Auxiliary Contact Blocks	2 x (1 NO + 1 NC)
Block Type	SL
Arc chute Material	Ceramic
Contact tips material	S6

### Description


Contactor single interruption in air, electromagnetic control by power save system. Single state functioning.

Reference standard IEC 60077.

### Electrical Characteristics

Rated Operational Voltage [ $V_{ac} / V_{dc}$ ]	1500
Max Operational Voltage [ $V_{ac} / V_{dc}$ ]	2000
Rated Insulation Voltage [V]	2000
Conventional Free Air Thermal Current [A] at 75°C	1600
DC-Rated Operational Current ( $\tau=15ms$ ) [A]	
1500V	1100
750V	2200
DC-Maximum Breaking Capacity ( $\tau=15ms$ ) [A]	
1500V	1800
750V	3600
AC-Maximum Breaking Capacity ( $\cos\phi=0,8$ ; 50Hz) [A]	
1500V	2200
750V	4500
Component Category / Operational Frequency Class	A2 / C3
Short Circuit Withstand Capacity for 5ms [kA]	16
Critical Current Range [A]	< 50 ( $U > 1500V_{dc}$ )
Fault Making Capacity [kA]	9.6
Blow Out Circuit Type	Indirect

Minimum clearances  
from metal parts [mm]  
X = 300; Y = 80 ; Z = 40

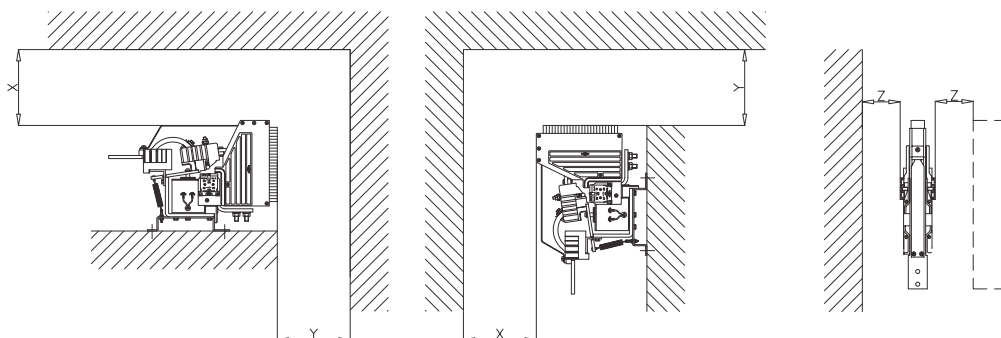

# Switches

LTHS17003SAT0

## Mechanical Characteristics

Mechanical Endurance (cycles)	2x10 <sup>6</sup>
Shock and Vibrations (IEC61373)	Cat.1 - Class B
Weight [kg]	45

## Control Circuit

Control Voltage Range	0.7U <sub>c</sub> ÷ 1.25U <sub>c</sub>
Power Consumption (U <sub>c</sub> and T = 20°C) at Pick Up - when Holding [W]	125 - 45
Mechanical Operation Time (U <sub>c</sub> and T = 20°C) when Closing - Opening [ms]	240 - 60
Time Constant (L/R) at Pick Up - when Holding [ms]	190 - 140
Electrical Connections	Screw M4

## Auxiliary Contacts

Tips material	Solid Silver
Rated Operational Voltage [V <sub>ac</sub> / V <sub>dc</sub> ]	250
Rated Current [A]	10
Minimum Switching Current at 16V <sub>dc</sub> [mA]	20
Electrical Connections	Fast-On 6.35x0.8mm

## Environmental Conditions

Stock Temperature Range	-50°C ÷ +85°C
Operational Temperature Range	-40°C ÷ +75°C
Pollution Degree - Overvoltage Category (EN 50124-1)	PD3 - OV3
Max Altitude without Performance Derating [m]	1500

