


# Switches

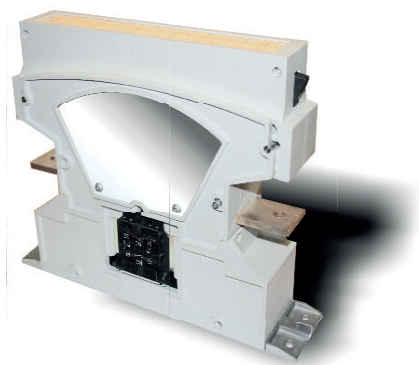

## LTCH10001\*A03

Type	LTCH 1000
Number of Poles	1 NO
Mounting Position	Horizontal - Vertical
Control Voltage Rating [V <sub>dc</sub> ]	24 ÷ 220
Auxiliary Contact Blocks	Max 2 (1 NO + 1 NC or 2 NO)
Block Type*	SL
Arc chute Material	Ceramic
Contact tips material*	S6

\* For details please refer to dedicated technical note




### Description

Contactor with double interruption in air, electromagnetic control by double winding coil. Single state functioning. Reference standard IEC 60077.

### Electrical Characteristics

Rated Operational Voltage [V <sub>ac</sub> / V <sub>dc</sub> ]	1500
Max Operational Voltage [V <sub>ac</sub> / V <sub>dc</sub> ]	2000
Rated Insulation Voltage [V]	2000
Conventional Free Air Thermal Current [A] at 75°C	1000
DC-Rated Operational Current (τ=15ms) [A]	
2000V	600
1000V	1200
DC-Maximum Breaking Capacity (τ=15ms) [A]	
2000V	1500
1000V	3000
AC-Maximum Breaking Capacity (cosφ=0,8; 50Hz) [A]	
2000V	1500
1000V	3000
Component Category / Operational Frequency Class	A2 / C3
Short Circuit Withstand Capacity for 5ms [kA]	20
Critical Current Range [A]	NONE
Fault Making Capacity [kA]	12
Blow Out Circuit Type	Indirect with Arcing Contact

Minimum clearances  
from metal parts [mm]  
X = 330; Y = 100 ; Z = 30



# Switches

LTCH10001\*A03

## Mechanical Characteristics

Mechanical Endurance (cycles)	2x10 <sup>6</sup>
Shock and Vibrations (IEC61373)	Cat.1 - Class B
Weight [kg]	10

## Control Circuit


Control Voltage Range	0.7U <sub>c</sub> ÷ 1.25U <sub>c</sub>
Power Consumption (U <sub>c</sub> and T = 20°C) at Pick Up - when Holding [W]	300 - 10
Mechanical Operation Time (U <sub>c</sub> and T = 20°C) when Closing - Opening [ms]	150 - 40
Time Constant (L/R) at Pick Up - when Holding [ms]	10 - 115
Electrical Connections	Burndy connector 12 pins

## Auxiliary Contacts

Tips material	Solid Silver (Gold plating opt)
Rated Operational Voltage [V <sub>ac</sub> / V <sub>dc</sub> ]	250
Rated Current [A]	10
Minimum Switching Current at 16V <sub>dc</sub> [mA]	20
Electrical Connections	Fast-on 6.35 x 0.8mm (screw M4 opt.)

## Environmental Conditions

Stock Temperature Range	-50°C ÷ +85°C
Operational Temperature Range	-40°C ÷ +75°C
Pollution Degree - Overvoltage Category (EN 50124-1)	PD3 - OV3
Max Altitude without Performance Derating [m]	1500

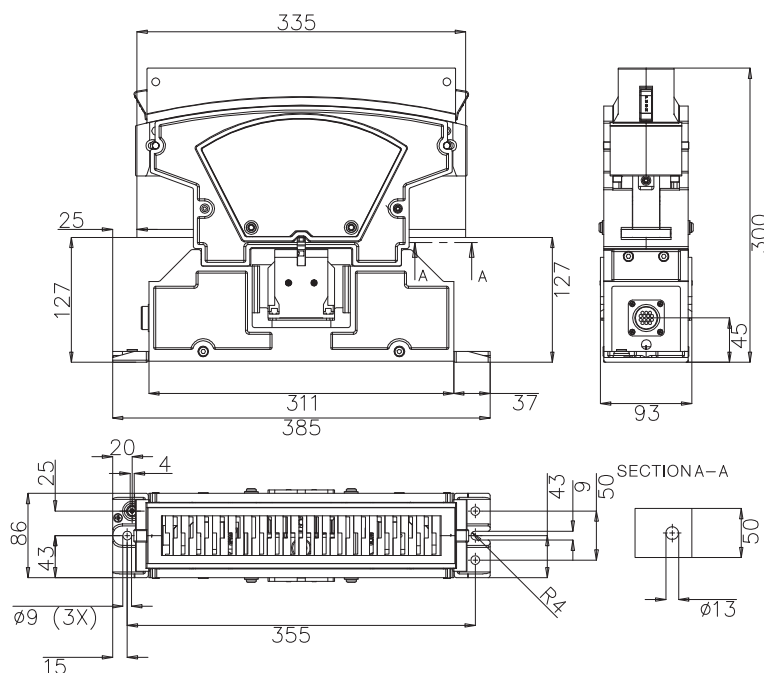

Rev.02 04/2013

bitsadv.com